


Debris Removal from Unit 3 Reactor Building at Fukushima Daiichi Nuclear Power Station

Remote control system for heavy machinery used for demolition



Heavy Machineries Used for Debris Removal (Examples)

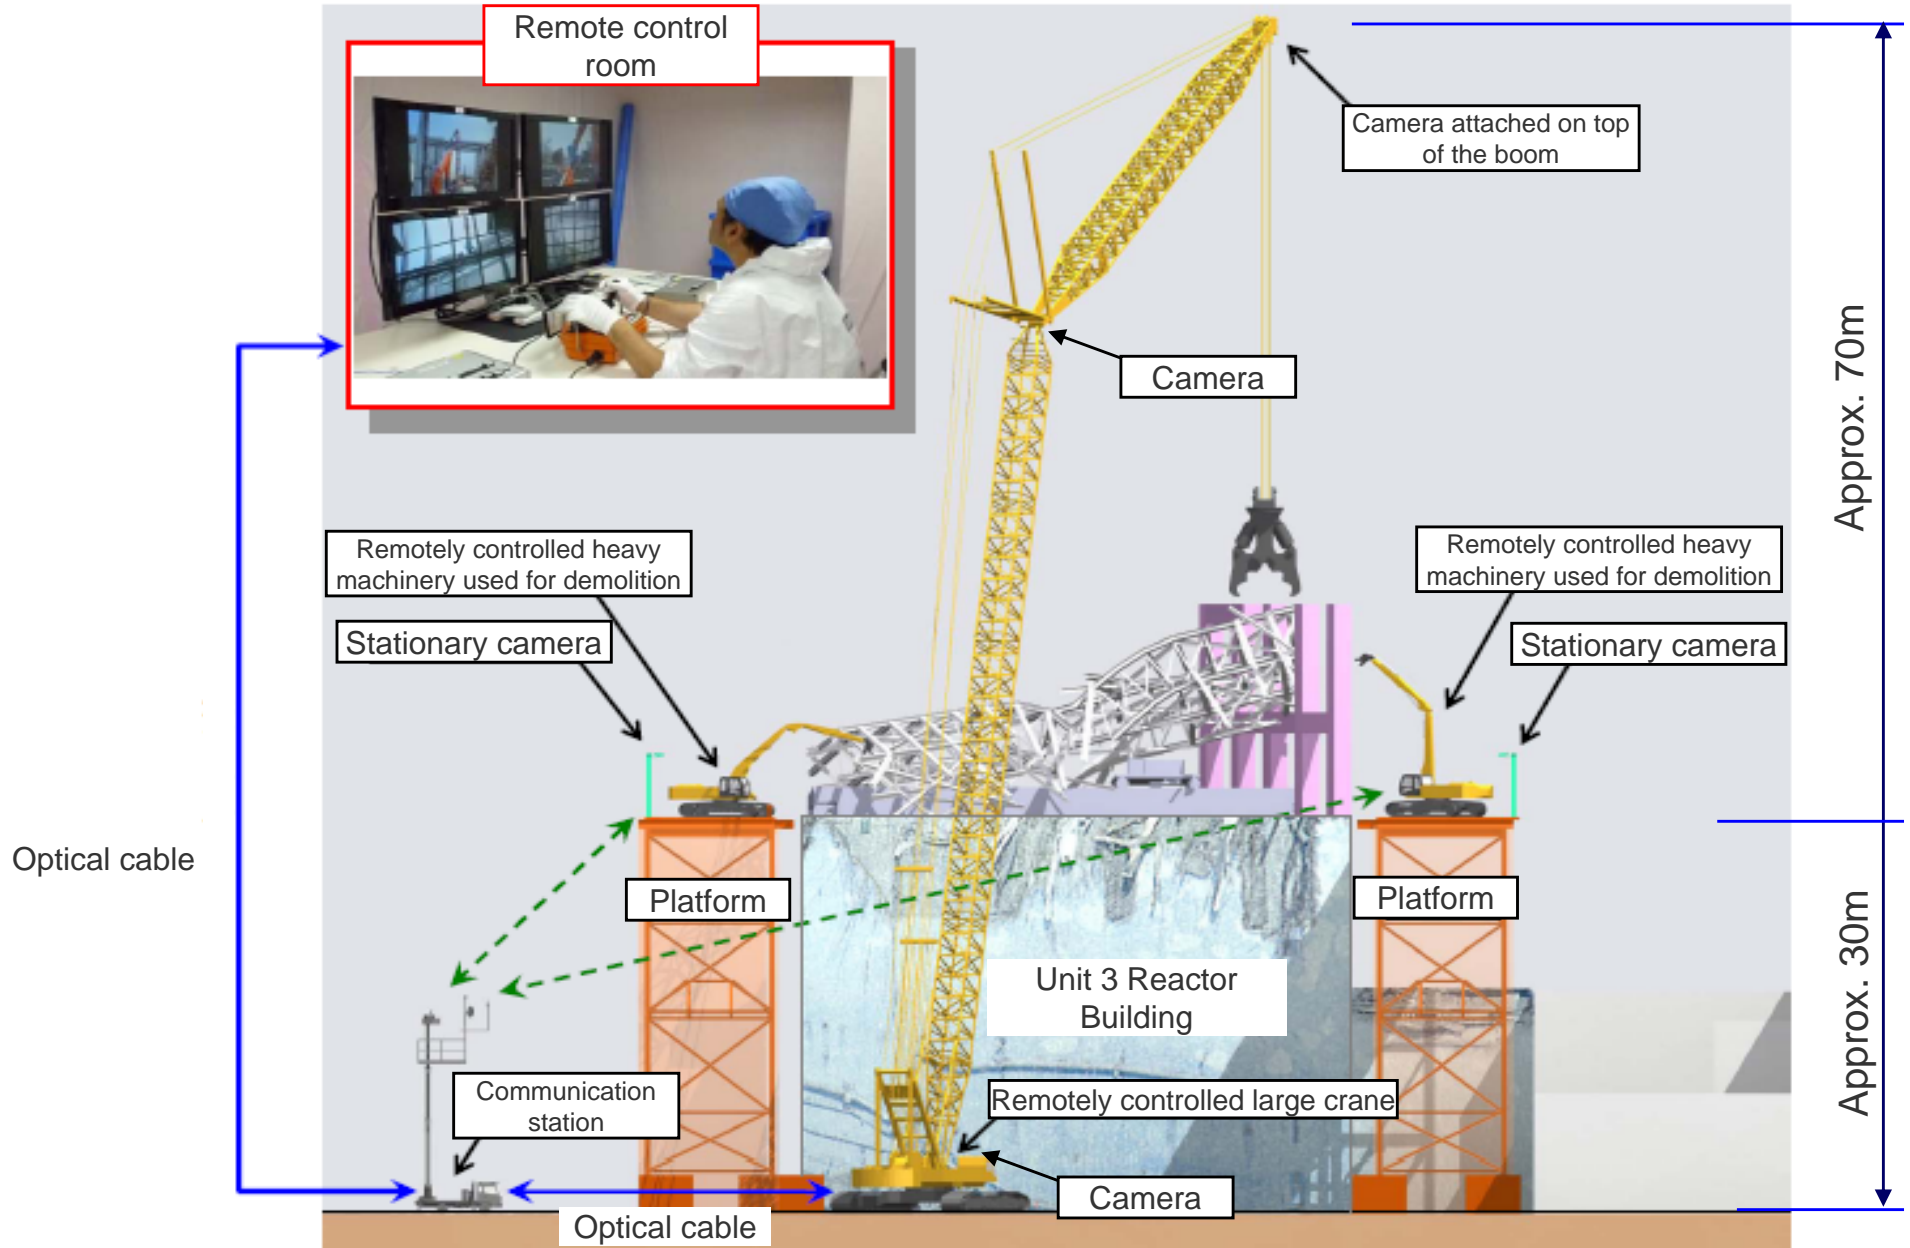

Oil pressure fork lift

Used for grabbing and lifting up and down the steel materials



Oil pressure grab bucket

Used for scooping up the debris on the slabs



Oil pressure cutter

Used for cutting the roof truss and overhead traveling crane



Oil pressure pliers

Used for removing scattered debris

Conditions before debris removal and the current conditions



Before debris removal

Photo taken on November 10, 2011 by TEPCO



Current condition

Photo taken on September 21, 2012 by TEPCO

