


# Facilities of Groundwater Bypass

- There are twelve pump-up wells placed on the upstream side of the buildings.
- Pumped up groundwater is to be delivered to the special tank through special pipe and be stored temporarily.
- Water quality of the tank storage water is to be analyzed to verify if it falls below the criteria (operational targets), and when it is fulfilled the water will be discharged .

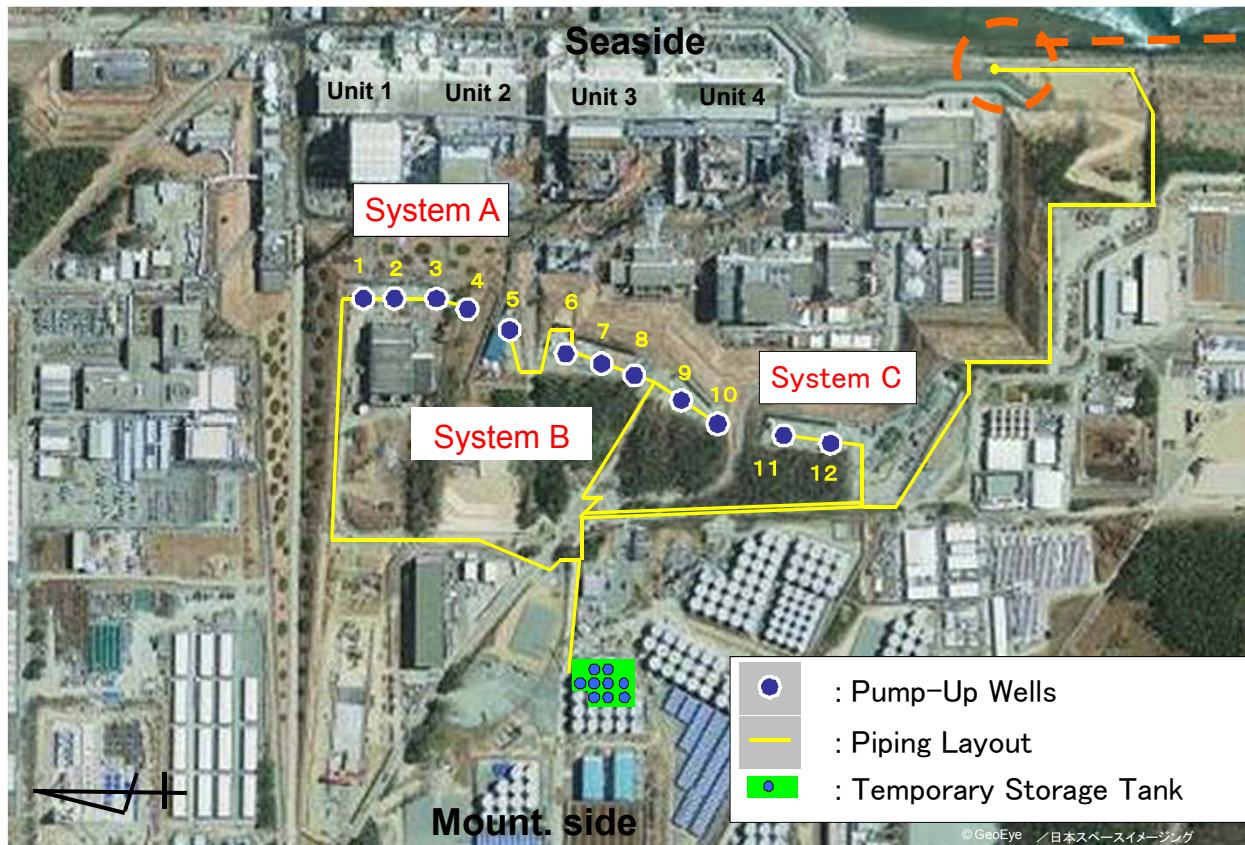

Water outlet

<Installation of pump-up wells, etc.>



Sealed-up structure is applied to pump-up wells



Special tanks and pipes are installed.