Situation of Storage and Treatment of Accumulated Water containing Highly Concentrated Radioactive Materials at Fukushima Daiichi Nuclear Power Station (456th Release)

June 22, 2020 Tokyo Electric Power Company Holdings, Inc.

1. Introduction

This document is to report the following matters in accordance with the instruction of "Installment of treatment facility and storing facility of water containing highly concentrated radioactive materials at Fukushima Daiichi Nuclear Power Station of the Tokyo Electric Power Company (Instruction) "(NISA No. 6, June 8, 2011), dated on June 9, 2011.

<Instruction>

TEPCO should report to NISA the situation of storing and treatment of the contaminated water in the Power Station and the future forecast based upon the current situation has to be reported to NISA as soon as the treatment facility starts its operation. Also, subsequently, continued report has to be submitted to NISA once a week until the treatment of the accumulated water in the Central Radioactive Waste Treatment Facility is completed.

2. Situation of storing and treatment of accumulated water in the building (actual record)

Stored amounts in each unit building (Units 1 to 4 (including condensers and trenches)) and stored and treated amounts, and other related data in the Accumulated Water Storing Facility as of June 18, 2020 are shown in the Attachment -1.

3. Forecast of storing and treatment

(1) Short term forecast

Water transfer in Units 1 and 2 and Units 3 and 4 is planned based on the stored amount in the Accumulated Water Storing Facilities and the operating situation of the radioactive material treatment equipment and the subdrain catchment facility. Water is transferred to the Process Main Building and/or High Temperature Incinerator Building as Accumulated Water Storing Facilities.

Treatment is implemented considering the state of storage and transfer of Accumulated Water Storing Facilities.

We assume stored amounts in each unit building (Units 1 to 4 (including condenser and trench)), and stored and treated amounts, and other related data in the Accumulated Water Storing Facilities as of June 25, 2020 are shown in Attachment -2.

1

(2) Middle term forecast

Regarding accumulated water in Units 1 and 2 buildings and Units 3 and 4 buildings, from the viewpoint of reducing the risks of discharging to the ocean and leaking into the groundwater, it is necessary to keep enough capacity for the accumulated water in the building until its level reaches TP. 2,564 and to keep the accumulated water level lower than the groundwater level.

On the other hand, based on the view of limiting inflow of underwater to buildings and reducing the amount of emerged accumulated water, we are planning to transfer accumulated water keeping specific water-level difference between accumulated water in the building around and subdrain water and making the lowest floor surface of buildings other than Units 1 to 3 reactor buildings where circulating water is injected into exposed by 2020.

As for accumulated water of the Process Main Building and the High Temperature Incinerator Building, we are planning to treat the accumulated water considering the situation of construction of middle and low level waste water tanks, the operation factor of the radioactive material treatment instruments and duration for maintenance.

We forecast stored amounts in each unit building (Units 1 to 4 (including condensers and trenches)), and storing and treatment situations in the Accumulated Water Storing Facilities for the next 3 months, as shown in Attachment -3.


Stored amounts in each building and the water storage equipment are forecasted to be unchanged in case transfer and treatment were implemented as scheduled without rain. However, it would be subject to change depending on the operation factor of the radioactive material treatment instruments and so on.

Also, the water treated at the radioactive material treatment equipment (fresh water and condensed salt water) can be stored in the middle and low level waste water tanks.

END

Attachment-1

Storage and treatment of high level radioactive accumulated water (as of June 18, 2020)

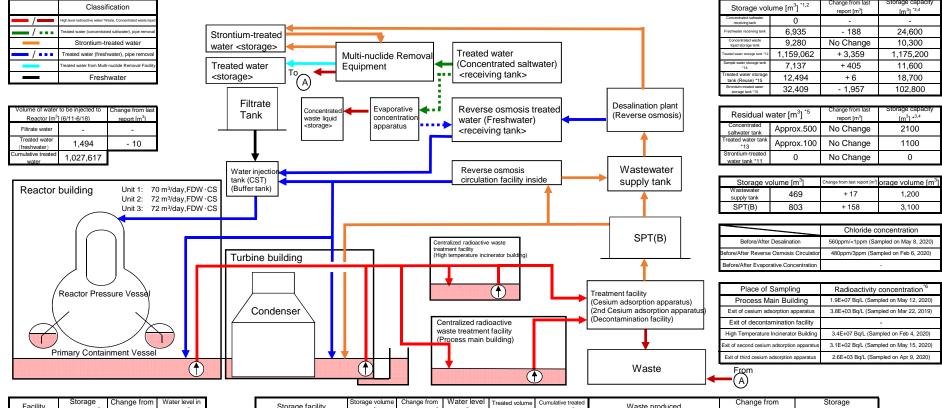

Storage volume [m ³]	Change from last report	Water level in T/B *8		Storage facility		Change from last report [m ³]	-	Treated volume (6/11-6/18)	Cumulative treated volume [m ³]	Waste pro	duced	Change from last report	Storage capacity
Approx.1,290	No Change		Р	Process Main Building	Approx.6,580	- 900	T.P.134	Approx. 3,040	Approx. 2,283,860	Sludge [m ³]	417 *16	No Change	700 *3
Approx.2,940	+ 10	T.P 1,508		High Temperature Incinerator Building	Approx.3,520	+ 100	T.P.661	*7	*7	Used vessels	4,833 *9	+ 13	6,372
Approx.2,700	- 440	T.P 1,585		Total	Approx.10,100	*1 The figures of the data are treated as a reference, because water levels during water transfer are not stable.							
Approx 1 260	+ 10	Under				*2 The figures of the storage volume do not include those of the following volumes that have accumulated from the bottom of the tanks to the height of so-called 'down scale (DS), "where water gauges show 0%:							

[Main operations that have been conducted during the period from June 11, 2020 to June 18, 2020]

T.P. - 1.479

Water transfer from the Units 1-4 to the buildings (Units 1-4, Centrailzed radioactive waste treatment facilities) and to the treatment facilities was conducted whenever necessary

Due to other works, water transfer to the buildings (Units 1-4, Centrailzed radioactive waste rteatment facilities) was conducted whenever necessary. Operations of the Cesium Adsorption Apparatus have been suspended.

From June 11, operations of the 2nd Cesium Adsorption Apparatus have been resumed; the availability factor is 36% (previous simulated : 50%).

+ 10

From June 17, operations of the 2nd Cesium Adsorption Apparatus have been suspended.

Operations of the 3rd Cesium Adsorption Apparatus have been suspended

Unit 1

Unit 2

Unit 3

Unit 4

Total

Approx.1,360

Approx.8,290

Freshwater receiving tank (approx. 1,100m³), Concentrated waste liquid storage tank (approx.100m³), Treated water storage tank (approx. 2,100m³)

Treated waters broade tank (uppluse) (proor i) contentionate water induced water storage tank (uppluse room)). Treated waters broade tank (uppluse) (upproc. Min)). Stronitum-treated water storage tank (upproc. room)). "3 The figures of the data show the operational limits. "4 The figures of 'Storage capacity' do not include those of the volumes that have accumulated from the bottom of the tanks to the height of so-called 'down scale (DS), where water gauges show 0%. However, each tank has the capacity that accomodate more than the storage volume that accumulated to 'DS.'

- *5 The figure of "Residual water" includes the one of the volumes that have accumulated from the bottom of the tanks to the height of so-called "down scale (DS)," where water gauges show 0%. The amount of the residual water of concentrated
- saltwater is calculated based on that of the water treated through the ALPS and other facilities.

*6 The data shown here are those of Cs-137.

*7 Total treated amount of Cesium adsorption apparatus and 2nd Cesium adsorption apparatus and 3rd Cesium adsorption apparatus Breakdown of the treated amount: Cesium adsorption apparatus (0m³) 2nd Cesium adsorption apparatus (3,040m³)

3rd Cesium adsorption apparatus (0m3)

Breakdown of the cumulative treated amount: Cesium adsorption apparatus (394,720m3)

2nd Cesium adsorption apparatus (354,720m) 3rd Cesium adsorption apparatus (1,848,990m³) 3rd Cesium adsorption apparatus (40,150 m³)

*8 The data of the water levels in the Reactor Buildings are the data as of 5 a.m., June 18.
*9 Breakdown of the used vessels: Cesium adsorption apparatus (779), 2nd Cesium adsorption apparatus (232), 3rd Cesium adsorption apparatus (2) Others: Storage container (3,516), Treated column (17), Used vessel (222), Filiters and so forth (65)

*10 Volume of the Strontium-treated water stored in the welded-type tanks

*11 Volume of the Strontium-treated water remaining in the frange-type tanks *12 Volume of the treated water stored in the welded-type tanks

*13 Volume of the treated water remaining in the frange-type tanks *14 Volume of the treated water stored in the ALPS sample tanks (frange-type), the additional ALPS temporary storage tanks (welded-type) and the high performance ALPS temporary storage tanks (welded-type)

*15 Volume of the treated water stored in the reuse welded-type tanks which stored strontium-treated water before

(These welded-type tanks have been resued from 2019.)

*16 Sum of sludge and supernatant water (as of 12 a.m., June 18)

Attachment-2

ade capa

[m³] ^{*2,3}

24,600

10,300

1,176,500

11,600

18,700

102,800


Storage capacity*

Approx.2,100

Approx.1,100

0

Storage and treatment of high level radioactive accumulated water (as of June 25, 2020)

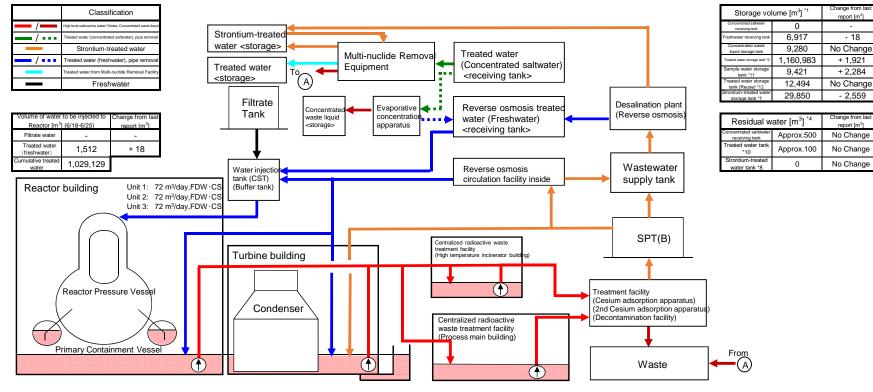

I	Water level in T/B	Storage Facility	Storage volume [m ³]	Change from last report [m ³]	Water level	Treated volume (6/18-6/25)	Cumulative treated volume [m ³]	Waste pro	oduced	Change from last report	Storage capacity
	-	Process Main Building	Approx.6,230	- 350	T.P 16	Approx. 2,940	Approx. 2,286,800	Sludge [m ³]	417	No Change	700 *2
	T.P 1,508	High Temperature Incinerator Building	Approx.3,530	+ 10	T.P.672	*5	*5	Used vessels	4,842 *6	+ 9	6,372
	T.P 1,585	Total	Approx.9,760								

[Main operations that are planned to be conducted during the period from June 18, 2020 to June 25, 2020]

Under

T.P. - 1,479

Water transfer from the Units 1-4 to the buildings (Units 1-4, Centrailzed radioactive waste treatment facilities) and to the treatment facilities will

be conducted whenever necessary

Storage

Approx.1,310

Approx.2,890

Approx.2,650

Approx.1,270

Approx.8,120

Facility

Unit 1

Unit 2

Unit 3

Unit 4

Total

- Due to other works, water transfer to the buildings (Units 1-4, Centrailzed radioactive waste rteatment facilities) will be conducted whenever necessary.

Operations of the Cesium Adsorption Apparatus will continue to be suspended.

Operations of the 2nd Cesium Adsorption Apparatus will be resumed (assumed availability factor : 35%).

Operations of the 2nd Cesium Adsorption Apparatus will be suspended.

Operations of the 3rd Cesium Adsorption Apparatus will continue to be suspended.

Change from

+ 20

- 50

- 50

- 90

last report

Storage capacity of treated water will be changed as operations of new tanks started.

*1 The figures of "Storage volume" do not include those of the volumes that have accumulated from the bottom of the tanks to the height of so-called "down scale (DS)," where water gauges show 0%. *2 The figures of the data show the operational limits.

2 The figures of "Storage capacitation initis." 3 The figures of "Storage capacity" do not include those of the volumes that have accumulated from the bottom of the tanks to the height of so-called 'down scale (DS)," where water gauges show 0%, However, each tank has the capacity that accomdates more than the storage volume that accumulates up to the height of 'DS." ⁴ The figure of 'Residual water' includes the one of the volumes that have accumulated from the bottom of the tanks to the height of so-called 'down scale (DS)," where water gauges show 0%. The amount of the residual water of concentrated saltwater

is calculated based on that of the water treated through the ALPS and other facilities. *5 Total treated amount of Cesium adsorption apparatus and 2nd Cesium adsorption apparatus and 3rd Cesium adsorption apparatus Breakdown of the treated amount: Cesium adsorption apparatus (0m³) 2nd Cesium adsorption apparatus (2,940m³)

3rd Cesium adsorption apparatus (0m³) Breakdown of the cumulative treated amount: Cesium adsorption apparatus (394,720m³) 2nd Cesium adsorption apparatus (1,851,930m³)

3rd Cesium adsorption apparatus (40,150m³) *6 Breakdown of the used vessels: Cesium adsorption apparatus (779)

b Breakdown of the used vessels. Cesium absorption apparatus (7/9) 2nd Cesium adsorption apparatus (22) 3rd Cesium adsorption apparatus (22) Others: Storage container (3,525), Treated column (17), Used vessels (222), Filters and so forth (65) *7 Volume of the Strontium-treated water stored in the welded-type tanks


*8 Volume of the Strontium-treated water remaining in the frange-type tanks *9 Volume of the treated water stored in the welded-type tanks


*10 Volume of the treated water remaining in the frange-type tanks


*11 Volume of the treated water stored in the ALPS sample tanks (frange-type), the additional ALPS temporary storage tanks (welded-type) and the high performance ALPS temporary storage tanks (welded-type)


*12 Volume of the treated water stored in the reuse welded-type tanks which stored strontium-treated water before (These welded-type tanks have been reused from 2019.)


Simulation Results of Accumulated Water Treatment in Units 1-4 Turbine

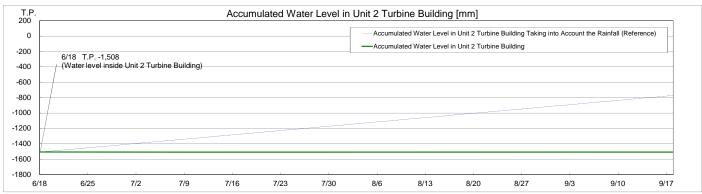

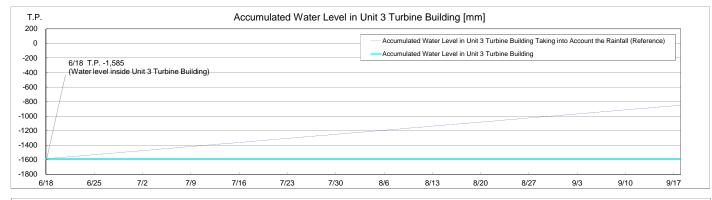

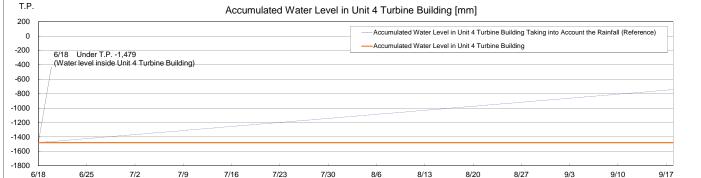

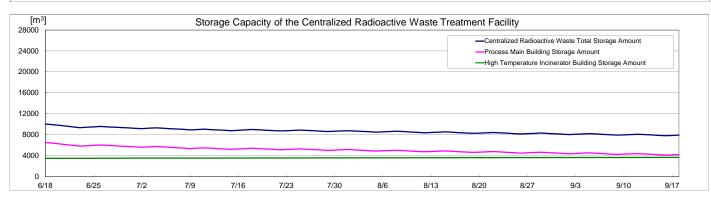

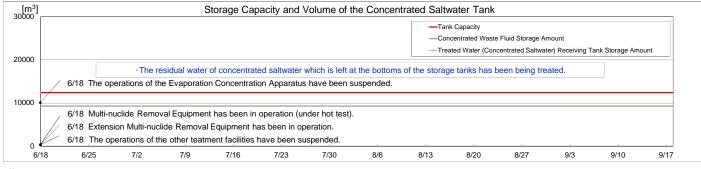

Note

The amount of water treated through the 2nd Cesium Adsorption Apparatus is estimated to be 780m³/d (Subject to change depending on the factors such as the levels of water accumulated in T/Bs.) - "Accumulated Water Levels in Unit 2, 3 and 4 T/Bs" are simulated water levels in consideration of the change of the water levels caused by recent rainfall, inflow of groundwater, etc.

in the surrounding areas of the Fukushima Datichi Nuclear Power Station. "Accumulated Water Levels in Unit 2, 3 and 4 T/Bs Taking into Account the Rainfall" are simulated water levels which are calculated by adding to the accumulated water amounts which are assumed to increase at the i of 8mm a day when the surrounding areas of the Fukushima Datichi Nuclear Power Station have the rainfall equal to the average amount of rain which fell for three months from August to October in 2015 to 2017.

Unit 2 Turbine Building water level is controled by retained water transfer pumps in the Unit 2 reactor building.
 Unit 3 Turbine Building water level is controled by retained water transfer pumps in the Unit 3 turbine building.
 Unit 4 Turbine Building water level is controled by retained water transfer pumps in the Unit 4 turbine building.