Situation of Storage and Treatment of Accumulated Water containing Highly Concentrated Radioactive Materials at Fukushima Daiichi Nuclear Power Station (470th Release)

September 28, 2020 Tokyo Electric Power Company Holdings, Inc.

1. Introduction

This document is to report the following matters in accordance with the instruction of "Installment of treatment facility and storing facility of water containing highly concentrated radioactive materials at Fukushima Daiichi Nuclear Power Station of the Tokyo Electric Power Company (Instruction) "(NISA No. 6, June 8, 2011), dated on June 9, 2011.

<Instruction>

TEPCO should report to NISA the situation of storing and treatment of the contaminated water in the Power Station and the future forecast based upon the current situation has to be reported to NISA as soon as the treatment facility starts its operation. Also, subsequently, continued report has to be submitted to NISA once a week until the treatment of the accumulated water in the Central Radioactive Waste Treatment Facility is completed.

2. Situation of storing and treatment of accumulated water in the building (actual record)

Stored amounts in each unit building (Units 1 to 4 (including condensers and trenches)) and stored and treated amounts, and other related data in the Accumulated Water Storing Facility as of September 24, 2020 are shown in the Attachment -1.

3. Forecast of storing and treatment

(1) Short term forecast

Water transfer in Units 1 and 2 and Units 3 and 4 is planned based on the stored amount in the Accumulated Water Storing Facilities and the operating situation of the radioactive material treatment equipment and the subdrain catchment facility. Water is transferred to the Process Main Building and/or High Temperature Incinerator Building as Accumulated Water Storing Facilities.

Treatment is implemented considering the state of storage and transfer of Accumulated Water Storing Facilities.

We assume stored amounts in each unit building (Units 1 to 4 (including condenser and trench)), and stored and treated amounts, and other related data in the Accumulated Water Storing Facilities as of October 1, 2020 are shown in Attachment -2.

1

(2) Middle term forecast

Regarding accumulated water in Units 1 and 2 buildings and Units 3 and 4 buildings, from the viewpoint of reducing the risks of discharging to the ocean and leaking into the groundwater, it is necessary to keep enough capacity for the accumulated water in the building until its level reaches TP. 2,564 and to keep the accumulated water level lower than the groundwater level.

On the other hand, based on the view of limiting inflow of underwater to buildings and reducing the amount of emerged accumulated water, we are planning to transfer accumulated water keeping specific water-level difference between accumulated water in the building around and subdrain water and making the lowest floor surface of buildings other than Units 1 to 3 reactor buildings where circulating water is injected into exposed by 2020.

As for accumulated water of the Process Main Building and the High Temperature Incinerator Building, we are planning to treat the accumulated water considering the situation of construction of middle and low level waste water tanks, the operation factor of the radioactive material treatment instruments and duration for maintenance.

We forecast stored amounts in each unit building (Units 1 to 4 (including condensers and trenches)), and storing and treatment situations in the Accumulated Water Storing Facilities for the next 3 months, as shown in Attachment -3.


Stored amounts in each building and the water storage equipment are forecasted to be unchanged in case transfer and treatment were implemented as scheduled without rain. However, it would be subject to change depending on the operation factor of the radioactive material treatment instruments and so on.

Also, the water treated at the radioactive material treatment equipment (fresh water and condensed salt water) can be stored in the middle and low level waste water tanks.

END

Attachment-1

Storage and treatment of high level radioactive accumulated water (as of September 24, 2020)

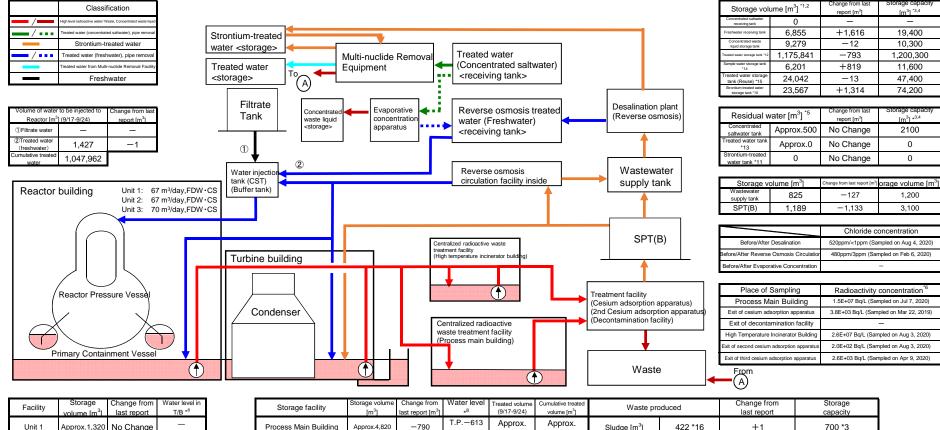

Fa	cility	volume (m ³)	last report	T/B *8
U	nit 1	Approx.1,320	No Change	—
U	nit 2	Approx.3,130	-230	T.P1,392
U	nit 3	Approx.2,010	-40	T.P1,617
U	nit 4	Approx.10	No Change	Under T.P1,479
Т	otal	Approx.6,470		

Storage facility	Storage volume [m ³]	Change from last report [m ³]	Water level	Treated volume (9/17-9/24)	Cumulative treated volume [m3]	Waste pro	Change from last report Storage capacity 422 *16 +1 700 *3		0
Process Main Building	Approx.4,820	-790	T.P613	Approx. 3,520	Approx. 2,323,950	Sludge [m ³]	422 *16	+1	700 *3
High Temperature Incinerator Building	Approx.3,200	+60	T.P.396	*7	*7	Used vessels	4,927 *9	+4	6,372
Total	Approx.8,020					as a reference, because wate			
				of the tanks t	o the height of so-calle	ed "down scale (DS)," where	water gauges show 0%:	e accumulated from the bottom rox.100m ³), Treated water stor	

[Main operations that have been conducted during the period from September 17, 2020 to September 24, 2020]

Water transfer from the Units 1-4 to the buildings (Units 1-4, Centrailzed radioactive waste treatment facilities) and to the treatment facilities was conducted whenever necessary

- Due to other works, water transfer to the buildings (Units 1-4, Centrailzed radioactive waste rteatment facilities) was conducted whenever necessary. Operations of the Cesium Adsorption Apparatus have been suspended.

From September 17, operations of the 2nd Cesium Adsorption Apparatus have been resumed; the availability factor is 42% (previous simulated: 40%).

Operations of the 3rd Cesium Adsorption Apparatus have been suspended

Treated water storage tank (reuse) (approx. 0m³), Strontium-treated water storage tank (approx. 300m³)

The ender water storage tank (teuse) (approx. onr), storaum-treated water storage tank (approx. outrr). "3 The figures of the data show the operational limits. "4 The figures of "Storage capacity" do not include those of the volumes that have accumulated from the bottom of the tanks to the height of so-called "down scale (DS)," where water gauges show 0%. However, each tank has the capacity that accomod more than the storage volume that accumulates up to the height of "DS."

*5 The figure of "Residual water" includes the one of the volumes that have accumulated from the bottom of the tanks to the height of so-called "down scale (DS)," where water gauges show 0%. The amount of the residual water of concentrated

saltwater is calculated based on that of the water treated through the ALPS and other facilities.

*6 The data shown here are those of Cs-137. Total treated amount of Cesium adsorption apparatus and 2nd Cesium adsorption apparatus and 3rd Cesium adsorption apparatus.

Breakdown of the treated amount: Cesium adsorption apparatus (0m³) 2nd Cesium adsorption apparatus (3,520m³)

3rd Cesium adsorption apparatus (0m3)

Breakdown of the cumulative treated amount: Cesium adsorption apparatus (394,720m3)

2nd Cesium adsorption apparatus (354,720m) 3rd Cesium adsorption apparatus (1,889,080m³) 3rd Cesium adsorption apparatus (40,150 m³)

*8 The data of the water levels in the Reactor Buildings are the data as of 5 a.m., September 24.
*9 Breakdown of the used vessels: Cesium adsorption apparatus (779), 2nd Cesium adsorption apparatus (238), 3rd Cesium adsorption apparatus (2) Others: Storage container (3,603), Treated column (17), Used vessel (223), Filiters and so forth (65)

*10 Volume of the Strontium-treated water stored in the welded-type tanks

*11 Volume of the Strontium-treated water remaining in the frange-type tanks *12 Volume of the treated water stored in the welded-type tanks


*13 Volume of the treated water remaining in the frange-type tanks *14 Volume of the treated water stored in the ALPS sample tanks (frange-type), the additional ALPS temporary storage tanks (welded-type) and the high performance ALPS temporary storage tanks (welded-type)

*15 Volume of the treated water stored in the reuse welded-type tanks which stored strontium-treated water before

(These welded-type tanks have been resued from 2019.)

*16 Sum of sludge and supernatant water (as of 9 a.m., September 24)

Storage and treatment of high level radioactive accumulated water (as of October 1, 2020)

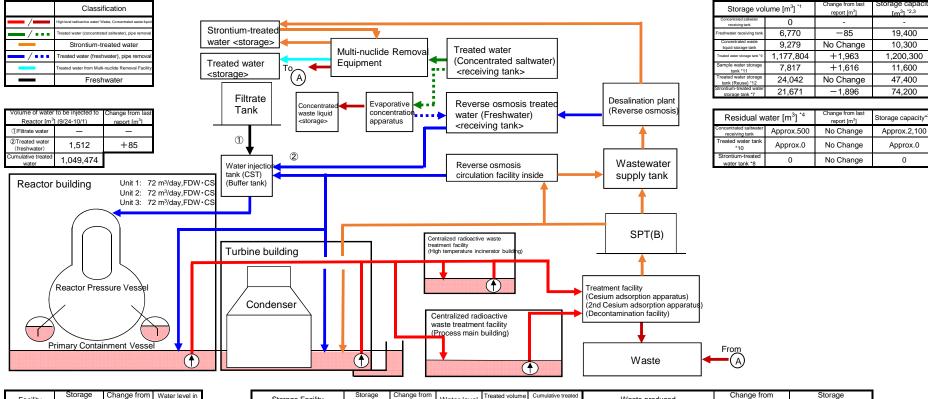

Storage Facility	Storage volume [m ³]	Change from last report [m ³]	Water level	Treated volume Cumulative treated (9/24-10/1) volume [m ³]		Waste produced		Change from last report	Storage capacity	
Process Main Building	Approx.4,280	-540	T.P843	Approx. 2,940	Approx. 2,326,890 *5	Sludge [m ³]	422	No Change	700 *2	
High Temperature Incinerator Building	Approx.3,210	+10	T.P.407	*5		Used vessels	4,934 *6	+7	6,372	
Total	Approx.7,490									

[Main operations that are planned to be conducted during the period from September 24, 2020 to October 1, 2020]

T/B

T.P.-1,392

T.P.-1.617

TP - 1 47

Under

Water transfer from the Units 1-4 to the buildings (Units 1-4, Centrailzed radioactive waste treatment facilities) and to the treatment facilities will

be conducted whenever necessary

Approx.1,330

Approx.3,070

Approx.10

Approx.6,420

Approx.2,010 No Change

Facility

Unit 1

Unit 2

Unit 3

Unit 4

Total

- Due to other works, water transfer to the buildings (Units 1-4, Centrailzed radioactive waste rteatment facilities) will be conducted whenever necessary. Operations of the Cesium Adsorption Apparatus will continue to be suspended.

Operations of the 2nd Cesium Adsorption Apparatus will be suspended (assumed availability factor : 35%) Operations of the 3rd Cesium Adsorption Apparatus will continue to be suspended.

last report

+10

-60

No Change

*1 The figures of "Storage volume" do not include those of the volumes that have accumulated from the bottom of the tanks to the height of so-called "down scale (DS)," where water gauges show 0%. *2 The figures of the data show the operational limits.

2 The figures of "Storage capacitation initis." 3 The figures of "Storage capacity" do not include those of the volumes that have accumulated from the bottom of the tanks to the height of so-called 'down scale (DS)," where water gauges show 0%, However, each tank has the capacity that accomdates more than the storage volume that accumulates up to the height of 'DS." ⁴ The figure of 'Residual water' includes the one of the volumes that have accumulated from the bottom of the tanks to the height of so-called 'down scale (DS)," where water gauges show 0%. The amount of the residual water of concentrated saltwater

is calculated based on that of the water treated through the ALPS and other facilities. *5 Total treated amount of Cesium adsorption apparatus and 2nd Cesium adsorption apparatus and 3rd Cesium adsorption apparatus Breakdown of the treated amount: Cesium adsorption apparatus (0m³) 2nd Cesium adsorption apparatus (2,940m³)

3rd Cesium adsorption apparatus (0m³) Breakdown of the cumulative treated amount: Cesium adsorption apparatus (394,720m³) 2nd Cesium adsorption apparatus (1,892,020m³)

3rd Cesium adsorption apparatus (40,150m³) *6 Breakdown of the used vessels: Cesium adsorption apparatus (779)

b Breakdown of the used vessels. Cesium absorption apparatus (7/9)
 2nd Cesium adsorption apparatus (238)
 3rd Cesium adsorption apparatus (238)
 Others: Storage container (3,610), Treated column (17), Used vessels (223), Filters and so forth (65)
 *7 Volume of the Strontium-treated water stored in the welded-type tanks

*8 Volume of the Strontium-treated water remaining in the frange-type tanks *9 Volume of the treated water stored in the welded-type tanks

*10 Volume of the treated water remaining in the frange-type tanks

*11 Volume of the treated water stored in the ALPS sample tanks (frange-type), the additional ALPS temporary storage tanks (welded-type) and the high performance ALPS temporary storage tanks (welded-type)

*12 Volume of the treated water stored in the reuse welded-type tanks which stored strontium-treated water before (These welded-type tanks have been reused from 2019.)

0

		Simula	tion Res	sults of	Accumu	ulated V	Vater Ti	reatmei	nt in Uni	its 1-4 ⁻	Turbine		Attachme
T.P. 200 г				Accum	nulated Wat	er Level in	Unit 2 Turk	oine Buildin	g [mm]				
0							Accumul	ated Water Leve	el in Unit 2 Turbin	e Building Takin	g into Account the	e Rainfall (Ref	erence)
-200							-Accumul	ated Water Leve	el in Unit 2 Turbin	e Building			
-400	9/24 T.P1,3	92											
-600	(Water level ins	ide Unit 2 Turb	oine Building)										
-800	_/												
1000	/						1100 (1000 - 1000 (1000 - 1000)						
1200	/			والمعاون									
1400													
1600													
1800		1		1		1	1				I.		
9/24	4 10/1	10/8	10/15	10/22	10/29	11/5	11/12	11/19	11/26	12/3	12/10	12/17	12/24
T.P. 200 г				Accum	ulated Wat	er Level in	Unit 3 Turb	oine Buildin	g [mm]				
0							Accumul	ated Water Leve	el in Unit 3 Turbin	e Building Takin	ig into Account th	e Rainfall (Ref	erence)
-200	Accumulated Water Level in Unit 3 Turbine Building Taking into Account the Rainfall (Reference) Accumulated Water Level in Unit 3 Turbine Building									·			
-400													
-600	9/24 T.P1,6'	7											
-800	(Water level ins		oine Building)										
1000											and the second		
1200 -	/					1000 (1000 (1000 (1000 (1000 (1000 (1000 (1000 (1000 (1000 (1000 (1000 (1000 (1000 (1000 (1000 (
1400	/												
600													
800 9/2-	4 10/1	10/8	10/15	10/22	10/29	11/5	11/12	11/19	11/26	12/3	12/10	12/17	12/24
T.P.				Accum	ulated Wat	er Level in	Unit 4 Turb	oine Buildin	g [mm]				
200							Accumul	ated Water Leve	l in Unit 4 Turbin	e Building Takin	g into Account the	e Rainfall (Ref	erence)
0 200									l in Unit 4 Turbin		5		
400	9/24 Under T. (Water level ins		ine Building)										
-600													
800												1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	
000	/							100 M 100					
200 -/					ومعاور ومعارضهم ومعارضهم والمحافظ والمحافظ والمحافظ والمحافظ		and a second						
400													
600													
800 L 9/24	4 10/1	10/8	10/15	10/22	10/29	11/5	11/12	11/19	11/26	12/3	12/10	12/17	12/24
[m ³]			01	0	it a full a Q	(l' l (D	\A/					
000 L			Stor	age Capac	ity of the Ce	entralized i	Radioactive	waste i re		-			
											ve Waste Total S g Storage Amoun	-	t
6000											cinerator Building		unt
2000													
3000													
000													
0 9/24	4 10/1	10/8	10/15	10/22	10/29	11/5	11/12	11/19	11/26	12/3	12/10	12/17	12/24
				Storage Ca									
[m ³]			`	clorage da	paony and	. siamo or			nk Capacity]
									nk Capacity ncentrated Wast	e Fluid Storage	Amount		
											ater) Receiving T	ank Storage A	mount
0000										icentrated baltw	;	anic otorago /	
0000		•The res	sidual water of	f concentrator	d saltwater wh	hich is left at	the hottoms o						

10000

0 9/24

11/5

10/8

10/1

Note The amount of water treated through the 2nd Cesium Adsorption Apparatus is estimated to be 780m³/d (Subject to change depending on the factors such as the levels of water accumulated in T/Bs.) - "Accumulated Water Levels in Unit 2, 3 and 4 T/Bs" are simulated water levels in consideration of the change of the water levels caused by recent rainfall, inflow of groundwater, etc. in the surrounding areas of the Fukushima Daiichi Nuclear Power Station. - "Accumulated Water Levels in Unit 2, 3 and 4 T/Bs Taking into Account the Rainfall" are simulated water levels which are calculated by adding to the accumulated water amounts which are assumed to increase at the ra of 8mm a day when the surrounding areas of the Fukushima Daiichi Nuclear Power Station have the rainfall equal to the average amount of rain which fell for three months from August to October in 2015 to 2017. - Unit 2 Turbine Building water level is controled by retained water transfer pumps in the Unit 2 reactor building. - Unit 4 Turbine Building water level is controled by retained water transfer pumps in the Unit 4 turbine building.

11/12

11/19

11/26

12/3

12/10

12/17

12/24

10/15

9/24 Multi-nuclide Removal Equipment has been in operation (under hot test). 9/24 Extension Multi-nuclide Removal Equipment has been in operation. 9/24 The operations of the other teatment facilities have been suspended.

10/22

10/29